



THERMAL BATTERY BTR-07

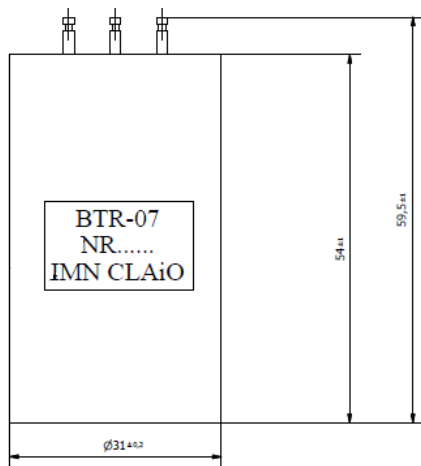

Technical data

Battery nominal voltage:	pins (+) – (-) pins 1 – 2 pins 3 – 4	from 33V to 24V at 2,5A non-active terminals of an electric primer
Current intensity:		~2,5A (peaks 4A)
Activation time:		max. 0,9s
Operating temperature:		from -35°C to +50°C
Operating time:		min. 30s
Weight:		max. 135 ± 10g
Storage time:		13 years

Application

- Rocket control system power source.